



FEATURES & BENEFITS

- Creates useable outdoor spaces at minimal cost
- Designed to be long-lasting, with only a few plastic components
- Side spline is shielded
- Heavy Duty top tube and bottom bar is standard
- Locks for manual blinds can be single or double-sided, and offset
- Bottom bar is located within its own channel means no wear marks and very strong design
- Bottom bar can be locked up for security in public areas
- Intermediate locking positions are easily provided on manual blinds

TECHNICAL SPECIFICATIONS

Maximum Width	6600mm
Maximum Area (m ²)	21
Standard Track Dimensions	50mm x 32mm
Bottom Bar Size (Heavy Duty)	62mm
Standard Axle (Heavy Duty)	84mm circular


Our Verandah Screen has been proven in thousands of installations in Australia and overseas over eight years and is protected by Patents and Registered Designs. It enables customers to create viable outdoor spaces in home and cafe situations at a fraction of the cost of alternatives.

Components are Australian sourced and designed to last for years in our conditions. Few plastic parts and no wear marks means they keep looking good with minimal maintenance. Heavy Duty top tubes and bottom bars are supplied as standard for peace of mind and reduced fabric sag.


With manual blinds the locks can be offset, and can be supplied double-sided. Intermediate locking positions can be easily provided to prevent the blinds creeping up.

MOUNTING OPTIONS

INSTALLATION TIP: Fix channel to surface & sit tracks in place. Each channel has +/- 5mm built-in adjustment. When happy with the blind's operation, fix track to channel. If the surface is square and measured correctly, there should be 5mm of channel visible on both sides when looking at the front of the blind.

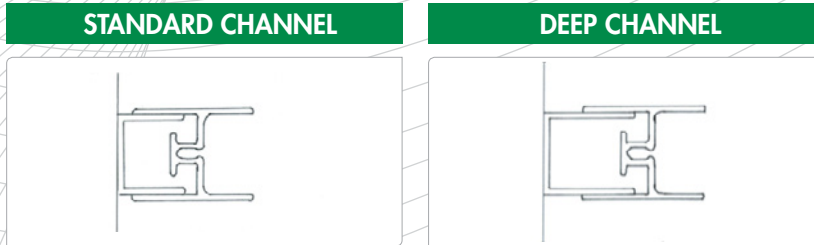

*10mm deeper than standard

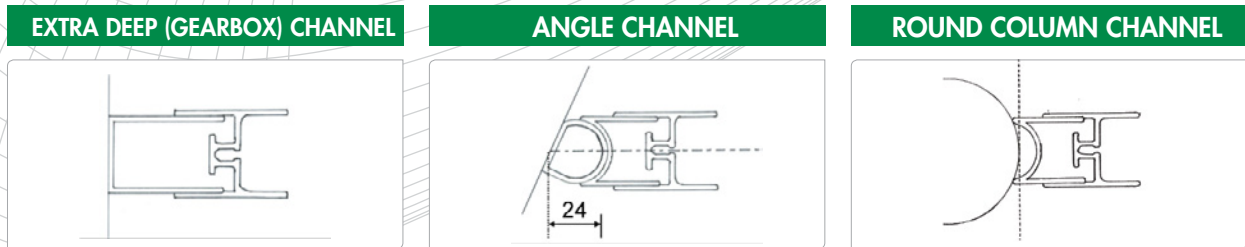

*21mm deeper than standard

*For fixing to an angled surface

*For fixing to circular columns

CONTROL OPTIONS

MANUAL



Spring Assist
*4500mm max width



Gearbox - Crank operated
*5000mm max width

MOTORISED



ODS with E-Port



E-Trans



SOMFY 240V
RTS with Transmitter

*6600mm max width

BOXING OPTIONS

BOX TYPE	MAXIMUM HEIGHT MOTORISED OR GEARBOX		MAXIMUM HEIGHT MANUAL	
	MESH	PVC	MESH	PVC
135 Enclosed	3000	2700	2500	2400
155 Enclosed	3500	3300	3500	3300
Mounted in Brackets	3500	3500	3500	3500
Semi-enclosed	3200	3200	3200	3200